



Waterproof Laminate Flooring

CLASSIC · 2026



K405 Solar Oak

Planks 1288 x 195 x 8 mm
Tiles 638 x 330 x 8 mm

A photograph of a dining area featuring a round wooden table and two wooden chairs with woven seats. Two small potted plants are on the table. The background is a light-colored wooden wall. The text is overlaid on the left side of the image.


Inspired by wood.
Protected from water.
Made by Kronospan.

Krono Original Classic brings the warmth of natural oak and the character of slate into every room. Each board is built on an O.R.C.A. waterproof core, so everyday spills are no cause for worry — in the kitchen, the hallway, or the family bathroom.


K406 Eurus Oak

Decor overview

Planks 1288 x 195 x 8 mm

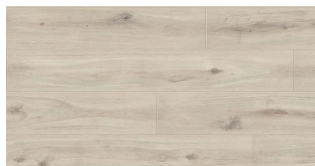

K231
Misty Plains Oak, TO




K406
Eurus Oak, NL




K405
Solar Oak, NL




K224
Wild West Oak, NL



K230
Golden Vista Oak, TO




K395
Tornado Oak, NL




K479
Espresso Carpenter Oak, CM

Tiles 638 x 330 x 8 mm

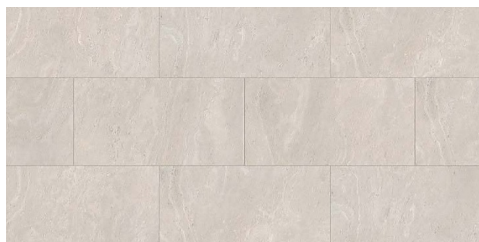

K881
Babylon Slate, AS

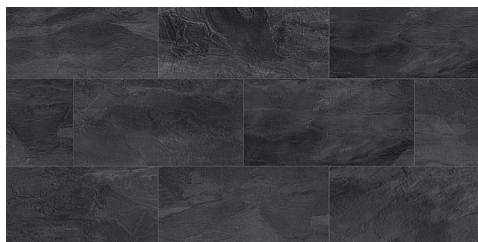

K389
Nightfall Slate, OS

All decors 8 mm with O.R.C.A. waterproof core and 1clic 2go pure+ joint. Two-letter codes indicate the surface texture.

Why O.R.C.A.



■ Waterproof O.R.C.A. core

Wood fibres are individually sealed in a moisture-repellent binder, giving 100h+ surface water protection.* Suitable for kitchens, hallways and private bathrooms.

■ 30-year warranty

Long-term peace of mind, according to Kronospan's warranty terms.

■ Organic, PVC-free core

Made from timber from sustainably managed forests, bound with organic binders.**

■ AC5 abrasion class


A hard-wearing surface rated AC5 — built for busy homes and commercial spaces alike.

■ Icllic 2go pure+ joint

Glueless click system for fast, clean installation. Boards can be lifted and re-laid.

■ Coordinated accessories

Decor-matched skirting boards, transition and ramp profiles, underlay and care products.

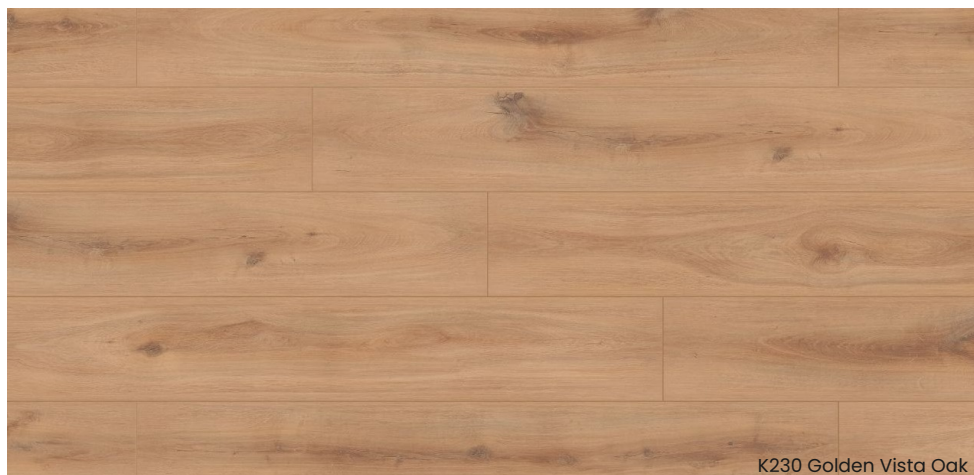

K230 Golden Vista Oak

* 24 h surface water protection as stipulated by NALFA, with additional 100h+ protection according to Kronospan works standard WN-101. ** May contain traces of PVC, e.g. from packaging. Warranty according to Kronospan warranty terms.

Two formats. One seamless look.



	Planks	Tiles
Format	1288 x 195 mm	638 x 330 mm
Thickness	8 mm	8 mm
Pieces per pack	9	11
Coverage per pack	2.26 m²	2.32 m²
Weight per pack	16.50 kg	17.16 kg
Packs per pallet	52	32

Packaging data: Krono Original catalogue 2026.



■ Planks


Warm oak, from misty greys to deep espresso.

K479 Espresso Carpenter Oak

K231

Misty Plains Oak

Surface TO · 1288 x 195 x 8 mm · O.R.C.A. waterproof

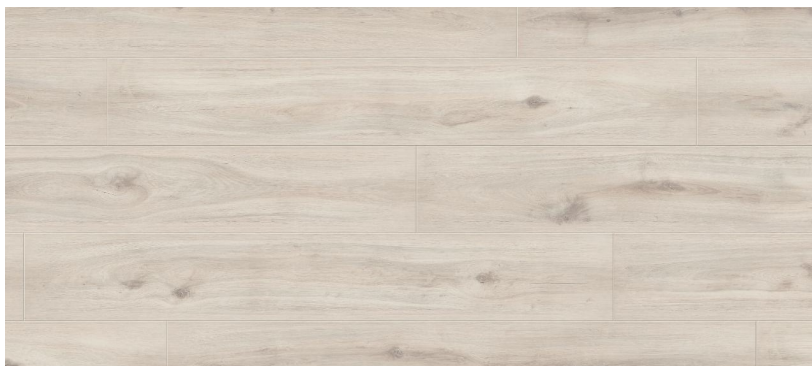

K231 Misty Plains Oak

Matching accessories

Skirting board K58C

2600 x 58 x 18 mm

colour L003

Transition profiles

900 / 2700 x 44 x 10 mm

colour L003

Ramp profile

2700 x 44 x 12 mm

colour L003

K406

Eurus Oak

Surface NL · 1288 x 195 x 8 mm · O.R.C.A. waterproof



6 Eurus Oak

Matching accessories

Skirting board K58C

2600 x 58 x 18 mm

colour 8575

Transition profiles

900 / 2700 x 44 x 10 mm

colour 8575

Ramp profile

2700 x 44 x 12 mm

colour 8575

K405

Solar Oak

Surface NL · 1288 x 195 x 8 mm · O.R.C.A. waterproof



Matching accessories

Skirting board K58C

2600 x 58 x 18 mm

colour R002

Transition profiles

900 / 2700 x 44 x 10 mm

colour R002

Ramp profile


2700 x 44 x 12 mm

colour R002

K224

Wild West Oak

Surface NL · 1288 x 195 x 8 mm · O.R.C.A. waterproof

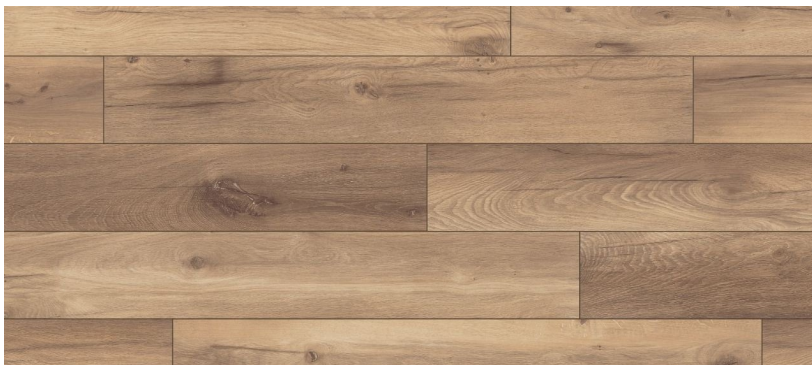

Matching accessories

Skirting board K58C

2600 x 58 x 18 mm

colour 8634

Transition profiles

900 / 2700 x 44 x 10 mm

colour 8634

Ramp profile

2700 x 44 x 12 mm

colour 8634

K230

Golden Vista Oak

Surface TO · 1288 x 195 x 8 mm · O.R.C.A. waterproof



K230 Golden Vista Oak

Matching accessories

Skirting board K58C

2600 x 58 x 18 mm

colour 8836

Transition profiles

900 / 2700 x 44 x 10 mm

colour 8836

Ramp profile

2700 x 44 x 12 mm

colour 8836

K395

Tornado Oak

Surface NL · 1288 x 195 x 8 mm · O.R.C.A. waterproof



K395 Tornado Oak

Matching accessories

Skirting board K58C

2600 x 58 x 18 mm

colour L071

Transition profiles

900 / 2700 x 44 x 10 mm

colour L071

Ramp profile


2700 x 44 x 12 mm

colour L071

K479

Espresso Carpenter Oak

Surface CM · 1288 x 195 x 8 mm · O.R.C.A. waterproof

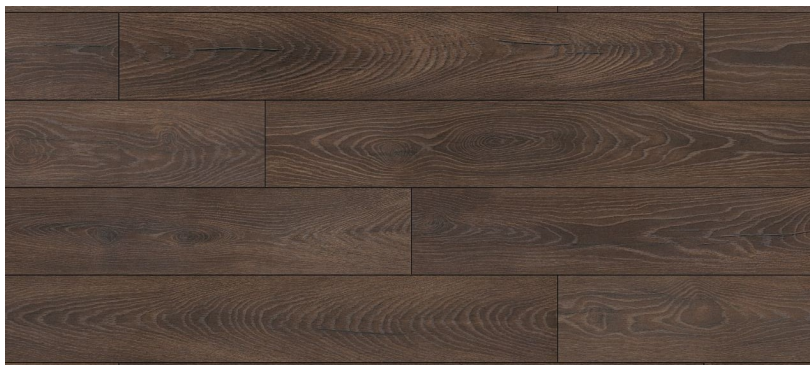

K479 Espresso Carpenter Oak

Matching accessories

Skirting board K58C

2600 x 58 x 18 mm

colour L132

Transition profiles

900 / 2700 x 44 x 10 mm

colour L105

Ramp profile

2700 x 44 x 12 mm

colour L105

■ Tiles


The rugged texture
of natural slate.

K389 Nightfall Slate

K881

Babylon Slate

Surface AS · 638 x 330 x 8 mm · O.R.C.A. waterproof

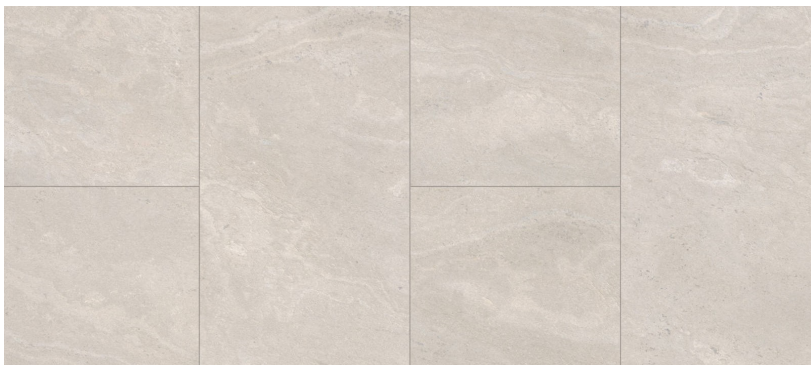


Matching accessories

Ask your Arete Wood showroom for matching skirting and profiles.

K389

Nightfall Slate

Surface OS · 638 x 330 x 8 mm · O.R.C.A. waterproof

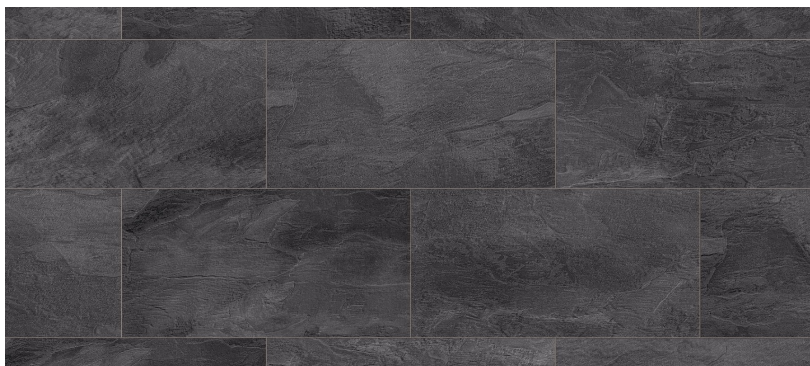

K389 Nightfall Slate

Matching accessories

Skirting board K58C

2600 x 58 x 18 mm

colour 8475

Transition profiles

900 / 2700 x 44 x 10 mm

colour 8475

Ramp profile

2700 x 44 x 12 mm

colour 8475

■ Accessories

Coordinated solutions




Every Classic decor is supported by decor-matched skirting boards and HDF profiles, plus the underlay, installation aids and care products needed for a perfect finish. All components are manufactured in Europe and available at Arete Wood.

Colour matching

Decor		Skirting K58C	Transition & ramp profiles
	K231 Misty Plains Oak	L003	L003
	K406 Eurus Oak	8575	8575
	K405 Solar Oak	R002	R002
	K224 Wild West Oak	8634	8634
	K230 Golden Vista Oak	8836	8836
	K395 Tornado Oak	L071	L071
	K479 Espresso Carpenter Oak	L132	L105
	K881 Babylon Slate	—	—
	K389 Nightfall Slate	8475	8475
	9002 White	9002	—

Skirting K58C: 18 mm deep MDF skirting that covers the expansion joint, fixed with mounting clips; cables can be run behind it. Colour codes are Kronospan skirting and profile decors.

Product list

	Article	Item No.	Size	Packing unit
	Skirting board K58C, decor-matched	91061	2600 x 58 x 18 mm	Box of 10 pieces
	Skirting board K58C, White 9002	91061	2600 x 58 x 18 mm	Box of 10 pieces
	Transition profile HDF	92197	900 x 44 x 10 mm	10 pieces / carton
	Transition profile HDF	91094	2700 x 44 x 10 mm	10 pieces / carton
	Ramp profile HDF	91114	2700 x 44 x 12 mm	10 pieces / carton
	3-in-1 profile, anodised stainless steel	95315-A002	1000 x 37 x 5 mm	10 pieces
	Underlay PUR 1.0	98535	1 mm, 10 m ² roll	Roll
	Aluminium jointing tape	98191	—	Roll
	Skirting mounting clips	91501	—	Bag
	Tap-block	90274	168/90 x 70 x 20 mm	Pack of 20 pieces
	Spacer wedges	90292	220 x 105 mm	Bag of 30 pieces
	Clickguard joint sealant	90431	125 ml, approx. 10 m ²	Tube
	Wax repair set	90511	—	Set

Underlay PUR 1.0 is the recommended system underlay for O.R.C.A. floors. Clickguard seals the joints for commercial rooms and private bathrooms. The wax repair set fixes small chips and scratches.

Installation

Laying O.R.C.A. Classic floors

1 Acclimatise

Store the unopened packs for 48 hours in the room where they will be laid, at 15–30 °C and around 40–70 % relative humidity.

2 Prepare the subfloor

It must be level (max. 2 mm per metre), dry, clean and stable. Remove carpet. Check screed moisture before laying.

3 Moisture barrier

On concrete or screed, lay PE foil with 50 mm overlaps, taped with aluminium tape and turned up 1–2 cm at the walls. Not on wooden subfloors.

4 Underlay

Lay PUR 1.0 underlay edge to edge, without overlaps, so its joints do not sit under the board joints.

5 Expansion gap

Keep a gap to all walls, pipes and door frames with spacers: gap (mm) = 1.5 x room length (m).

6 Click together

Start in the left corner, tongue side to the wall. Angle the short end in at 30° and lay flat. Offset joints row to row by at least 30 cm.

7 Wet areas

For bathrooms and commercial rooms, apply Clickguard to the joints as you lay and remove excess within 15–20 minutes.

8 Finish

Remove the spacers, fix skirting clips every 40–50 cm, fit the skirting and add profiles at doorways.

Summary only. Always follow the full O.R.C.A. installation instructions supplied with the flooring to keep your warranty rights.

Contact us



@ARETEWOOD

■ Lagos Branch

1 Shasha Road, Opposite (UBA Bank)
Off Lagos Abeokuta Expressway
Dopemu, Lagos.
Phone: +234 916 115 6000
Email: lagos@aretewood.com

■ Abuja Branch

Bassan Plaza,
2, Wole Olanipekun Street
CBD, Abuja.
Phone: +234 803 305 6464
Email: abuja@aretewood.com

■ Port Harcourt Branch

The Arcade
30 Sani Abacha Road, GRA
Port Harcourt.
Phone: +234 704 700 7530
Email: portharcourt@aretewood.com